
PROFIVE® MIT7X

APPLICATIONS

The **PROFIVE**® **MIT7X** mainboard is optimal adapted for:

- _ Rugged Industrial Systems no rotating parts, low power
- _ Medical Solutions
 Intel® Core™ performance, highresolution graphics
- _ Automatic Control scalable, long term availability, flexible expansion
- _ Measurement Multiple graphics
- _ Public Terminal
 Digital Signage, Multiple Displays
 support
- _ Mobile Solutions optimized for automotive power input, small form factor



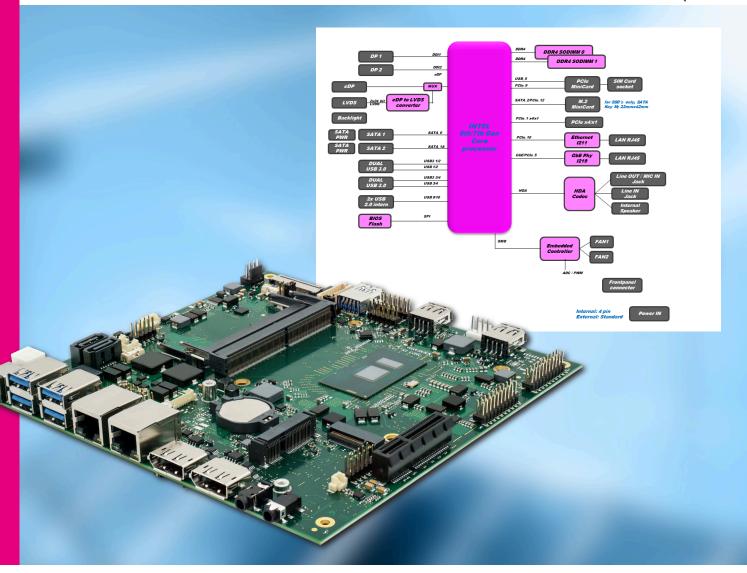







SPECIFICATIONS

CPU Intel® 7th Generation Core™ processors¹

BIOS **UEFI-BIOS**

Up to 32 GB DDR4 dual-channel Max. memory

memory support up to 2133 MT/s

Gigabit Ethernet Up to 2 Intel® integrated GbE/ I211

PCI Express® x4 or x1 slot, depending on version

PCI Express® Mini Card 1fullsize socket with SIM Card socket

M.2 socket 1Key M, 22 mm x 42 mm (SSD only)

Serial ATA Up to 3 (6G)

USB ports Up to 9 USB 2.0, up to 5 USB 3.0

SM bus

LVDS connector 1dual channel 18/24-bit

(up to 1920 x 1200 @ 60 Hz)

Display Port connector 2(up to 4096 x 2304 @ 60 Hz)

eDP connector 1(up to 4096 x 2304 @ 60 Hz)

Sound Multi-channel HDA, one Line In, one MIC

In, one Line Out and speaker connector

Health monitoring and

management

Controllable fan, hardware monitoring and watchdog

Min. 8 V / Max. 32 V (DC), EMI filtering on board, automotive grade, dual power Power supply

connector | KL15

Max. operating temp. 0°C to +60 °C ambient

Max. storage temp. -20 °C to +85 °C

Max. rel. humidity 95 % @ 40 °C, non-condensing

Size approx. 170 mm x 170 mm

Microsoft® Windows® 10; OS support

Microsoft[®] Windows[®] 10 loT Enterprise;

Linux Ubuntu 18.04 LTS, Yocto Project 2.2

15 years availability according to CPU manufacturers specification


Mini-ITX 170x170


Ordering Code CPU	Description	Туре
MIT7A	Mini ITX Board	Celeron 3965U / 2.2 GHz / 2 MB cache / PCle x1
MIT7B	Mini ITX Board	Celeron 3965U / 2.2 GHz / 2 MB cache / PCle x4 /*
MIT7C	Mini ITX Board	i3-7100U / 2.4 GHz / 3 MB cache / PCle x1
MIT7D	Mini ITX Board	i3-7100U / 2.4 GHz / 3 MB cache / PCIe x4 /*
MIT7E	Mini ITX Board	i5-7300U / 2.6 GHz / 3 MB cache / PCle x1
MIT7F	Mini ITX Board	i5-7300U / 2.6 GHz / 3 MB cache / PCIe x4 /*
MIT7G	Mini ITX Board	i7-7600U / 2.8 GHz / 4 MB cache / PCle x1
MIT7H	Mini ITX Board	i7-7600U / 2.8 GHz / 4 MB cache / PCIe x4 /*

*without rear USB/LVDS/eDP

Ordering Code Memory	Description	Size
4GB-MIITX	Main memory	4GB
8GB-MIITX	Main memory	8GB
16GB-MIITX	Main memory	16 GB







eDP and LVDS



Dual Display Port



The information contained in this document has been carefully checked and is believed to be reliable. However, E.E.P.D. GmbH makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of what ever nature resulting from the use of, or reliance upon, it. E.E.P.D. does not quarantee that the use of any information contained herein will not infringe upon the patent, trademark, copyright or other rights of third parties, and no patent or other license is implied hereby. Intel and the Intel logo are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries. This document does not in any way extend E.E.P.D.'s warranty on any product beyond that set forth in its standard terms and conditions of sale. E.E.P.D. reserves the right to make changes in the products or specifications, or both, presented in this publication at any time and without notice.

E.E.P.D.'s products are not intended for use as critical components in life support appliances, devices or systems in which the failure of a E.E.P.D. product to perform could be expected to result in personal injury. All mentioned trademarks are registered trademarks of their owner. ©2024 by E.E.P.D. GmbH. All rights reserved. March 12 2024 - Version 3.5

E.E.P.D. Electronic Equipment Produktion & Distribution GmbH Gewerbering 3

85258 Weichs - Germany Phone +49 8136 2282-0 Internet: www.eepd.de E-Mail: sales@eepd.de